


STEARNS 4 PULLEY ELECTROMAGNETIC CROSS-BELT SEPARATOR



TECHNICAL SPECIFICATIONS

MODEL	DIMENSIONS (INCHES)			STANDARD VOLTS DC	APPROX. WATTS	BELT WIDTH (IN.)	DRIVE H.P.	APPROX. WT. (LBS.)
	A	B	C					
25A	63.000	39.25	37.125	115	2,320	30	2.0	2,860
30A	68.000	39.25	38.375	115	2,752	30	2.0	3,430
36A	76.375	43.50	38.375	115	4,290	32	3.0	4,600
38A	78.000	48.50	40.500	115	4,120	36	3.0	5,500
43A	84.500	53.50	41.375	115	5,060	42	3.0	6,900
48/54M	91.000	59.50	41.125	115	6,200	48	5.0	8,900
48A	91.000	59.50	43.125	115	6,200	48	5.0	9,170
54A	96.000	65.50	44.500	230	7,560	54	5.0	12,270
61A	103.750	73.75	45.750	230	9,260	60	5.0	15,770
68A	111.375	82.75	47.750	230	11,200	70	7.5	21,310
72A	128.000	84.00	57.000	230	13,900	72	10.0	28,500

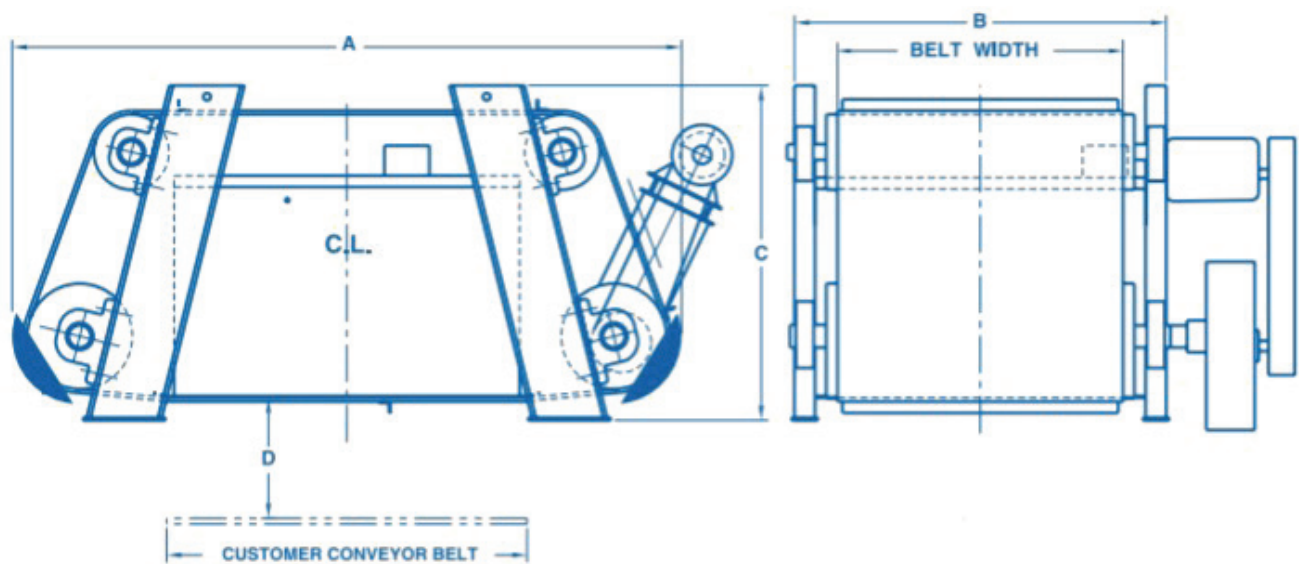

OHIO MAGNETICS, INC.
 5400 DUNHAM RD | MAPLE HEIGHTS, OH | 44317-3687
 TEL: (216) 662-8484 | sales@ohiomagnetics.com
 © 2022 OHIO MAGNETICS, INC.

Made in U.S.A.



www.ohiomagnetics.com

A WORLD LEADER IN LIFTING MAGNET SYSTEMS AND MAGNETIC SEPARATION EQUIPMENT