


# STEARNS 4 PULLEY ELECTROMAGNETIC IN-LINE SEPARATOR



## TECHNICAL SPECIFICATIONS

MODEL	DIMENSIONS (INCHES)			STANDARD VOLTS DC	APPROX. WATTS	BELT WIDTH (IN.)	DRIVE H.P.	APPROX. WT. (LBS.)
	A	B	C					
25A	72.000	30.25	37.125	115	2,320	20	1.5	2,710
30A	82.500	35.50	38.375	115	2,752	24	2.0	3,330
36A	78.375	41.50	38.375	115	4,290	30	3.0	4,500
38A	82.500	43.25	40.500	115	4,120	30	3.0	5,410
43A	89.000	48.50	41.375	115	5,060	36	3.0	6,760
48/54M	97.000	53.50	41.125	115	6,200	42	3.0	8,700
48A	97.000	53.50	43.125	115	6,200	42	3.0	8,990
54A	103.250	59.50	44.500	230	7,560	48	5.0	12,160
61A	111.000	66.75	45.750	230	9,260	54	5.0	15,660
68A	120.375	73.75	47.750	230	11,200	60	7.5	20,880
72A	120.750	78.00	57.000	230	13,900	66	10.0	28,500

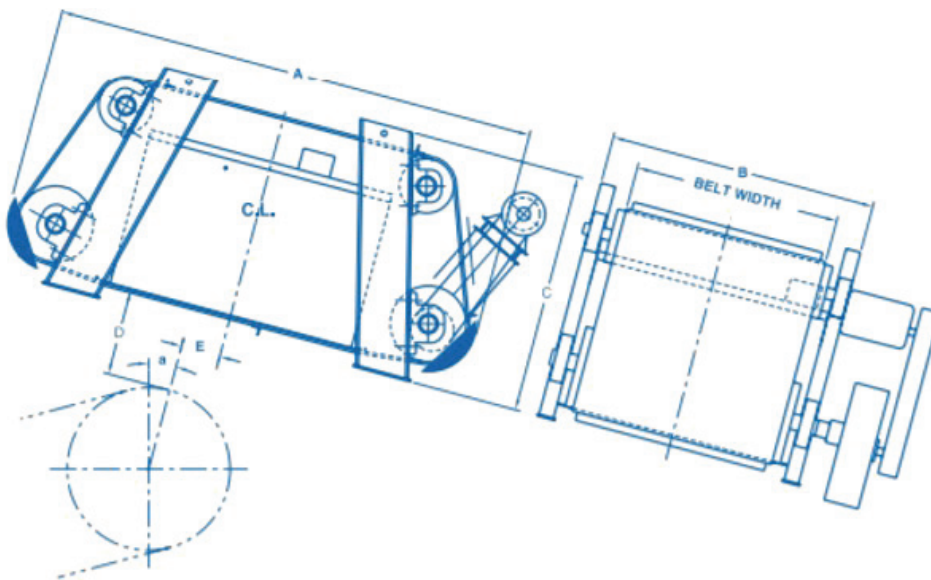

OHIO MAGNETICS, INC.  
 5400 DUNHAM RD | MAPLE HEIGHTS, OH | 44317-3687  
 TEL: (216) 662-8484 | sales@ohiomagnetics.com  
 © 2022 OHIO MAGNETICS, INC.

Made in U.S.A.



www.ohiomagnetics.com

A WORLD LEADER IN LIFTING MAGNET SYSTEMS AND MAGNETIC SEPARATION EQUIPMENT