


STEARNS PERMANENT CROSS-BELT SEPARATOR



TECHNICAL SPECIFICATIONS

MODEL	DIMENSIONS (INCHES)			BELT WIDTH (IN.)	DRIVE, HP	APPROX. WT. (LBS.)
	A	B	C			
18-720P	56	42	15	32	1.50	1,700
24-720P	62	42	15	32	1.50	1,800
30-720P	68	42	15	32	1.50	2,000
36-720P	74	42	15	32	1.50	2,300
18-900P	60	46	19	36	1.50	2,000
24-900P	66	46	19	36	1.50	2,400
30-900P	72	46	19	36	1.50	2,900
36-900P	78	46	19	36	1.50	3,400
18-1170P	68	57	20	47	3.00	3,300
24-1170P	74	57	20	47	3.00	4,200
30-1170P	80	57	20	47	3.00	5,100
36-1170P	86	57	20	47	3.00	6,000
42-1170P	92	57	20	47	3.00	7,000
48-1170P	98	57	20	47	3.00	7,900
18-1350P	71	65	22	50	5.00	4,200
24-1350P	77	65	22	50	5.00	5,300
30-1350P	83	65	22	50	5.00	6,400
36-1350P	89	65	22	50	5.00	7,500
42-1350P	95	65	22	50	5.00	8,100
48-1350P	101	65	22	50	5.00	8,600

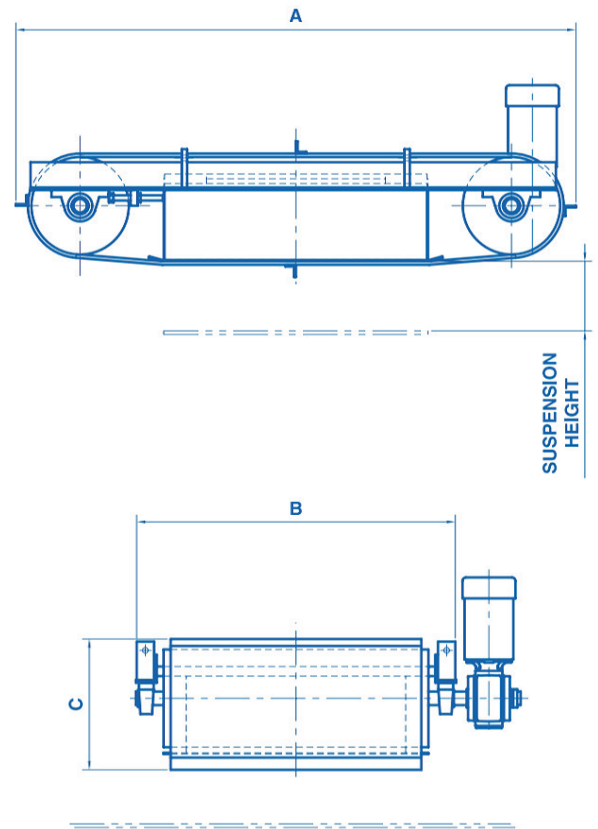

OHIO MAGNETICS, INC.
 5400 DUNHAM RD | MAPLE HEIGHTS, OH | 44317-3687
 TEL: (216) 662-8484 | sales@ohiomagnetics.com
 © 2022 OHIO MAGNETICS, INC.

Made in U.S.A.



www.ohiomagnetics.com

A WORLD LEADER IN LIFTING MAGNET SYSTEMS AND MAGNETIC SEPARATION EQUIPMENT